

K328i




THE GAME-CHANGER



3,5-28x50i

The groundbreaking K328i sets new performance standards with a pioneering new-generation optical design. It offers a 40 % wider field of view*, an exceptionally comfortable eyepiece and 8x zoom with perfect optical performance across the entire adjustment range.

Absolute precision, repeat accuracy and unique handling for maximum performance.

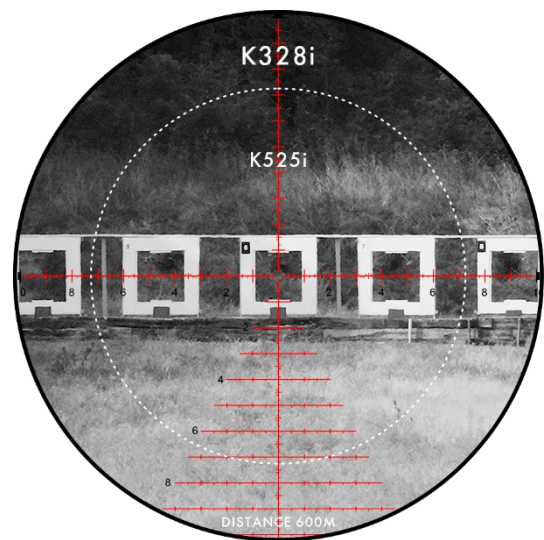

PRODUCT HIGHLIGHTS

- ◆ Revolutionary optical design with a 40 % wider field of view* and an exceptional eyepiece
- ◆ 8x zoom with perfect optical performance across the entire adjustment range
- ◆ Windage adjustment on the left or right with TWIST GUARD rotation protection
- ◆ Patented parallax adjustment integrated in the elevation turret (20 m to ∞)
- ◆ Absolutely reliable repeat accuracy and clearly defined clicks
- ◆ Precise illuminated reticles in 1st focal plane

*) Based on comparison with the K525i at 25x magnification.

K328i



K A H L E S

TECHNICAL DATA

K328i	3,5-28x50i
Magnification	3,5 - 28
Objective lens diameter (mm)	50
Field of view (m/100m)	14,3 - 1,8
Exit pupil diameter (mm)	1,8 - 7,4
Eye relief (mm)	92
Diopter compensation (dpt.)	+2 / -3
Parallax adjustment (m)	20 - ∞
Windage	left / right
Adjustment direction	CW / CCW
Adjustment range E/W (m/100m)	3,4 / 1,3
DLR-elevation turret incl. EasyRead	-
Impact correction per click	.1 MRAD
Tube diameter (mm)	36
Focal plane	1.
Reticles	AMR, MSR2/Ki, SKMR+, SKMR4+
Illuminated	✓
Twilight factor (DIN 58388)	13,2 - 37,4
Zero Stop	✓
TWIST GUARD	✓
Waterproof	✓
Length (mm)	360
Weight (g)	1040
Battery type	CR2032
Warranty (years)	10 (2 electronics)
Objective filter thread	M52 x 0,75
Accessories (optional)	Flip Up Cover objective/ocular, Parallax Spinner, Sunshield, Killflash ARD